



## ADVANCED TECHNOLOGIES FOR cGMP CLEANROOMS



## PERFECT CLEANROOM SPEAKERS

Finally, your cleanroom can safely and securely have sound! Ideal for Public Address or Alarms as well as 2 - way communication and even Entertainment! These cleanroom speakers provide superior audio quality and are designed specifically to meet the demand for cleanliness and safety in controlled environments including pharmaceutical cGMP areas as well as Healthcare, and Food & Beverage facilities. The DNH CR-6 (T) speaker system is a completely sealed design that provides years of quality sound output (music or speech) even when exposed to harsh cleaning agents.

### CR-6 (T) SPECIFICATIONS:

- Superior Sound Reproduction
- Completely sealed to be liquid and airborne particle proof
- Withstands typical cleanroom cleaning regime including the use of Spor-Klenz
- No maintenance required
- Compliant to ISO 14644-14
- Made of plastic - lightweight, less bulky, easy to Install
- Comes with mounting hardware for ceiling or wall mount (flush or surface)

VISIT US AT [www.SPSCLEANTECH.com](http://www.SPSCLEANTECH.com) or CALL 844.899.4GMP TODAY!

Contact SPS CleanTech, LLC for unique solutions to help design, build, renovate, or furnish a Cleanroom - we are here to serve!


# PERFECT CLEANROOM SPEAKERS

INDUSTRONIC




| CR-6 (T) Specifications          |                  |
|----------------------------------|------------------|
| Voltage                          | 100V             |
| Rated Power                      | 6W               |
| Impedance                        | 8Ω               |
| Effective Frequency Range        | 280Hz - 20,000Hz |
| Sound Pressure Level 1W/1M       | 85dB             |
| Sound Pressure Level Rated Power | 93dB             |
| Dispersion (-6dB) 1kHz/4kHz      | 170° / 150°      |
| Termination                      | 39" Lead         |
| Material                         | PA Nylon         |
| Color                            | RAL 9011         |
| IP Rating                        | IP67             |
| Min / Max Temperature Range      | -4°F to 194°F    |
| Weight Per Speaker               | 4.85 lbs         |
| Mounting                         | Ceiling or Wall  |
| Warranty                         | 2 Years          |

## SPL VS FREQ

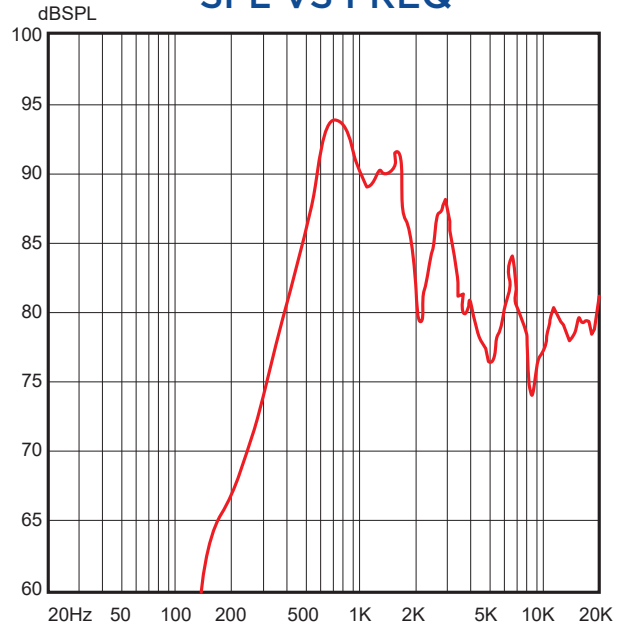

## DIMENSIONS (inches)

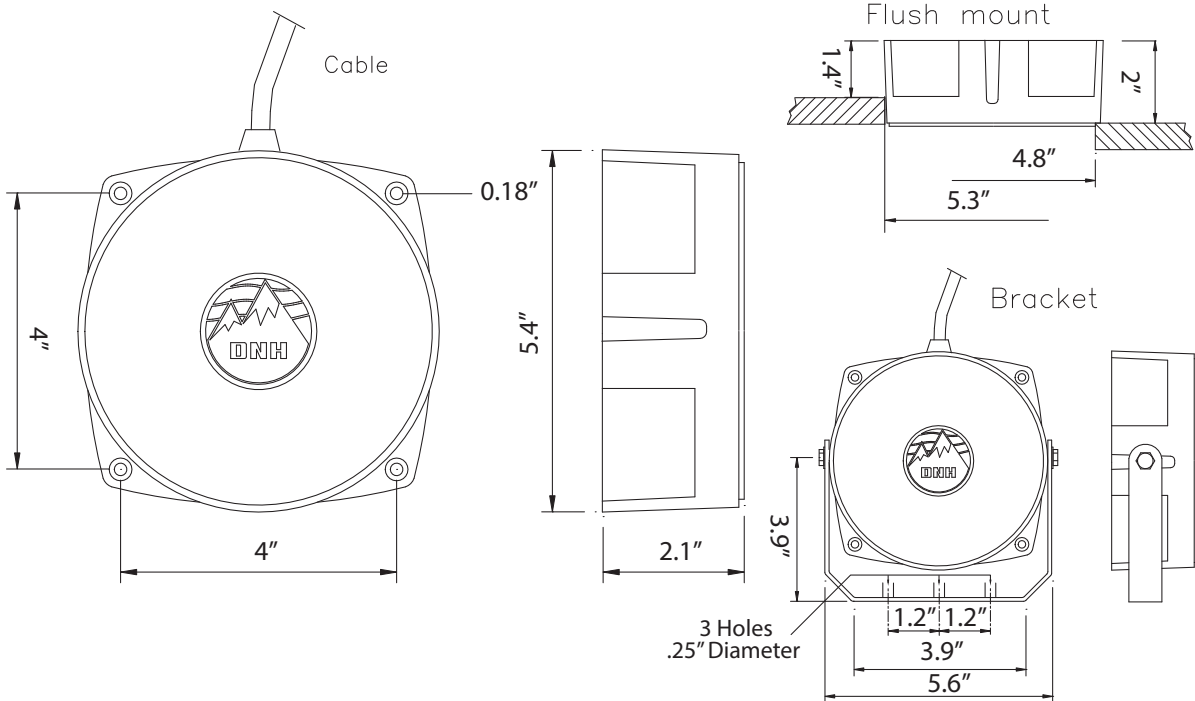

Corporate Office  
3265 Sunset Lane  
Hatboro, PA 19040

p: 215.675.5700  
f: 215.675.9540

New England Office  
50 Brigham Street  
Marlboro, MA 01752

p: 508.624.5577  
f: 508.624.7755



800.345.FLOW  
spscletech.com