

JAMOTUF™

WINDOW FRAMES

CORROSION RESISTANT ARCHITECTURAL STYLE FIBERGLASS REINFORCED PLASTIC WINDOW FRAMES

- *Superior Corrosion Resistance –
Guaranteed for Life*
- *Colorpigmented Frames*
- *Variety of Colors and Profiles*



STANDARD BASIC SPECIFICATIONS AND APPLICATIONS:

Supply where Fiberglass Reinforced Plastic Windows are indicated on plans. Fiberglass Frames from FRP structural pultrusions designed with integrally molded standard colors, comparable in strength to 16 gauge hollow metal frames. Jamb to header and sill joints are mitered and reinforced as required. Frames are of various profiles to fit all applications and shall be no less than 3/16" thick and have an industry standard 2" face with no attachment screws in the face. Wall anchors and glazing stop fasteners are all to be stainless steel.

Fixed windows are for use in:


- Separating process and warehouse areas, as well as providing visibility from offices or corridors.
- Where thermal or sound resistance is required
 - Insulated glazing may be used for improved performance.
 - Glazing options may include polycarbonate sheet or insulated units, as well as other common insulated or non-insulated glass types as required.

Window frames may be furnished with factory foam insulation when installed in butt applications.


STANDARD DESIGN OPTIONS:

1. Glazing options include .220" clear polycarbonate at non-insulated lites and 1" Insulated Polycarbonate at those requiring additional thermal resistance.
2. Foam Insulation is available for frames where butt application is selected.
3. 16 Gauge stainless steel frames in either face welded, fully welded, or knockdown styles are available in Type 304 or Type 316 stainless steel.

Jamotuf Fixed Window

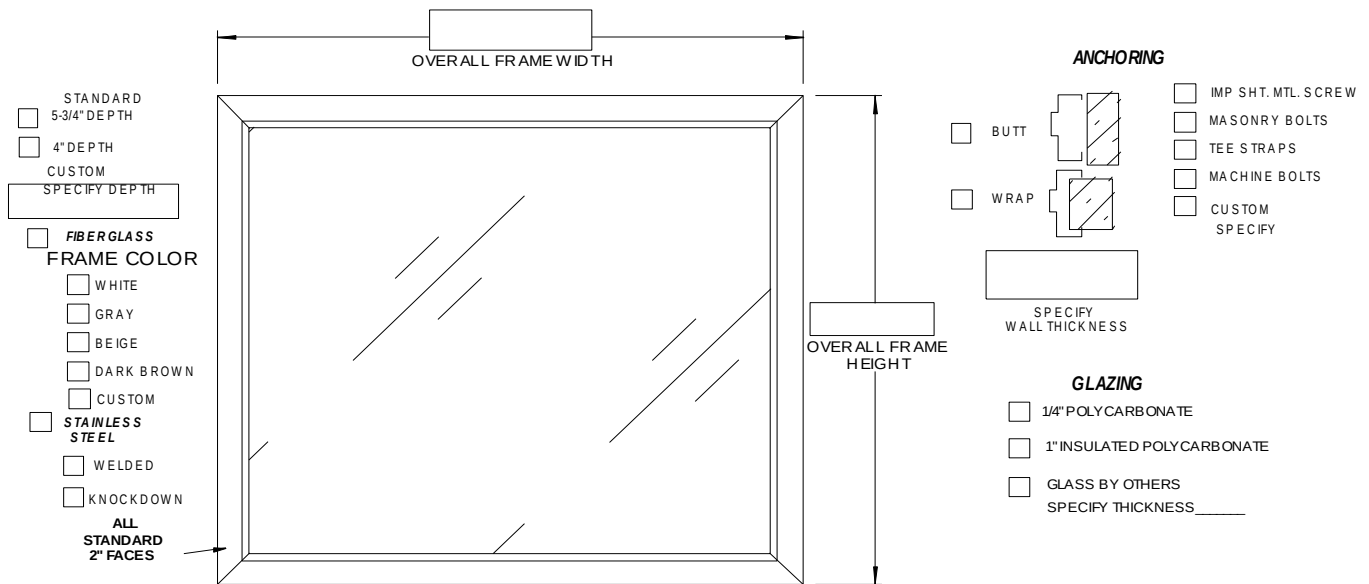

Standard Frame Profiles

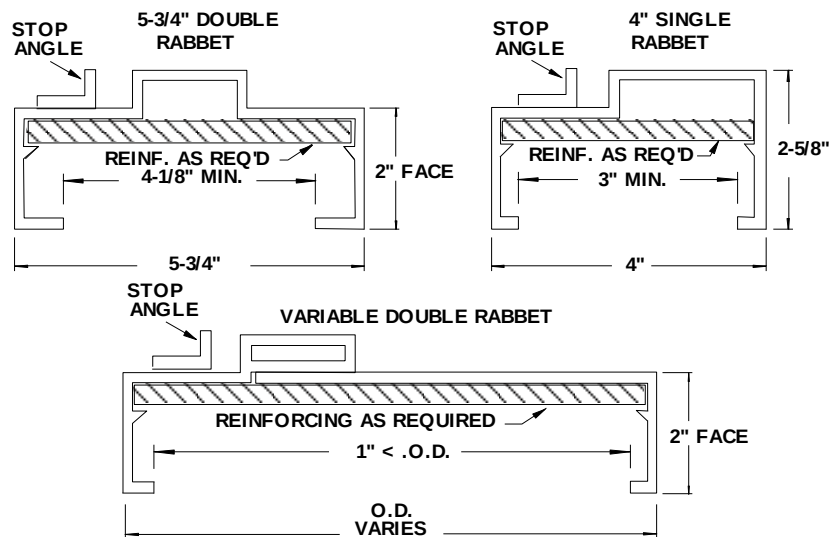

INSTALLATION POINTS:

1. Once received on job site, all damage to crating shall be reported to the freight company. All materials shall be stored in original crating, vertically on end, to prevent damage.
2. Install Doors and Frames in accordance with Jamotuf instructions and applicable portions of SDI 100. If opening is in a cold storage area, prepare any exposed bucks with suitable moisture protection and caulk all penetrations/joints with suitable sealant.
3. Install Frames Level, Plumb and Square and attach securely to suitable substrate using anchors provided prior to hanging door.
4. Do not cut or otherwise alter the integrity of the door without factory instructions. Install Hardware and seals as applicable.

JAMISON

Jamotuf, LLC
A Division Of Jamison Door Company
P.O. Box 70, Hagerstown, MD 21741-0070
PH. 800-532-3667
FAX. 301-733-3100